

KVM Extender (Console Module for the KH0116)



■ PS/2 Console



■ RJ-45 Connector for Cat 5 (or higher) cable Connection to the KH0116




■ LED Status Display

Console
PS/2

NEW OS Support
Vista

Diagram

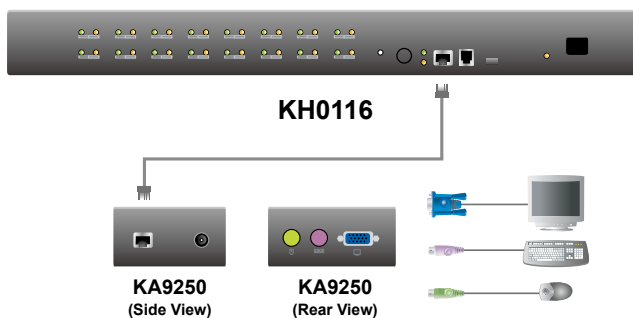

*Cat 5 (or higher) cable to connect the KA9250 to the KH0116 up to 150m away is sold separately.

Features

- Built-in ASIC for greater reliability and compatibility
- Cat 5 (or higher) cable to connect the remote unit to the KH0116 up to 150m away
- High resolution video—up to 1280 x 1024 (SXGA)
- Supports VGA, SVGA, and MultiSync monitors
- Automatic gain control—adjusts signal strength to compensate for distance

Specifications

Function		KA9250
Connectors	Keyboard	1 x 6-pin Mini-DIN Female (Purple)
	Video	1 x HDB-15 Female (Blue)
	Mouse	1 x 6-pin Mini-DIN Female (Green)
	Unit to Unit	1 x RJ-45 Female (Black)
LEDs	On Line	1 (Green)
	Power	1 (Orange)
Video		1280 x 1024
Cable Length		150m
Power Consumption		AC 9V, 4W (max.)
Environment	Operating Temp.	0–50° C
	Storage Temp.	-20–60° C
	Humidity	0–80% RH, Non-condensing
Physical Properties	Housing	Metal
	Weight	0.22 kg
	Dimensions (L x W x H)	10.00 x 8.50 x 3.50 cm

* The specifications and pictures are subject to change without notice.