




20" Widescreen 2036Va

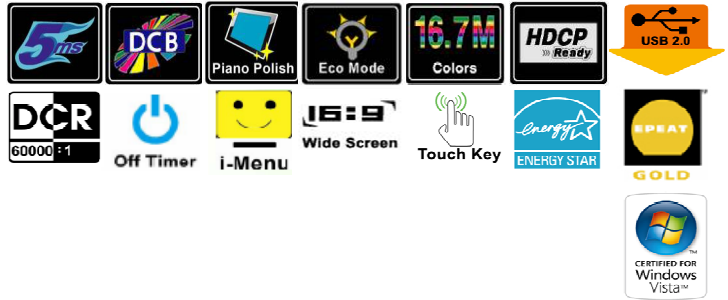

TECHNICAL SPECIFICATIONS

Model Name	2036Va
Viewable Image Size	508.05 mm
Pixel Pitch	0.2768(H)x0.2768(V)mm
Display Area	444.8(H)x250.2(V)mm
Brightness	250 cd/m ²
Contrast Ratio (typical)	60000:1(DCR)
Response Time (typical)	5ms
Viewing Angle	160/160(CR≥10)
Scan Frequency	H:30~80KHz V:55~75Hz
Pixel Frequency	145MHz
Max. Resolution	1600 x 900@60Hz
Recommended Resolution	1600 x 900@60Hz
Display Colours	16.7M
Compatibility	VESA,VGA,SVGA,XGA,WSXGA,Mac®
HDCP* Compatible	Yes
Input Signal	Analogue RGB and DVI
Input Connector	15-Pin D-Sub and 24-Pin DVI
Power Supply	110~240VAC, 50/60Hz
Power Consumption	Power On:<32W, Standby:<1W, DC Off: <0.4W
Plug & Play	DDC 1/2B/CI or VESA DDC2B™
User Control	Menu/Enter, Image Ratio/Source /Up, Auto/Down, Power
OSD Languages	15 languages
Speakers	Yes
Safety & Regulations	FCC, CE, CB, CUL, TUV/S, TUV-Bauart, EPEAT, Windows Vista
Wall-Mount**	VESA 100x100mm
Special Features	Touch Key, USB Bypass, DCR, Glossy bezel, Friendly OSD UI, Low power
Cabinet Colour	Black
WxHxD (w/base) mm	496.5x378.6x186mm
WxHxD (package) mm	558x356x130mm
Weight (Net /Gross)	4.2Kg/6.1Kg
EAN Code	471 120099104 8

Note: Specifications are subject to change without notice.

*High-bandwidth Digital CONTENT Protection: Enables viewing of High-Definition contents.

**Wall mount arm & bracket not includes.

Windows and the Windows logo are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries.